

SAC & COOLSAC

www.coolsac.com
Cool Down the Road...

INSTRUCTIONS XL SADDLEBAG KIT

GENERAL: This kit is designed for use on all 1994 and later XL models.

NOTE: A Service Manual for your model motorcycle is available from your Harley-Davidson Dealer.

INSTALLATION:

1. Remove the seat according to the applicable Service Manual instructions.
2. For solo seats, skip to step 4.
3. Two up seat: See Figure 1. Place the yoke (1) on the rear fender with the opening toward the front of the motorcycle, and rubber side against the fender. Pull the passenger grab strap (2) through the opening.
4. Solo seat: Place the yoke (1) on the rear fender with the opening toward the front of the motorcycle, and rubber side against the fender. Position the yoke so that the rear seat bracket overlaps the front of the yoke, and the mounting bolt can pass through the opening.
5. Install the passenger seat according to the applicable Service Manual instructions.
6. Attach the saddlebags (3) to the yoke using the clips.

7. Run the straps (4) at the rear of the saddlebags around the turn signal strut, and clip back into the bag. Tighten the straps until snug.

8. Run the front straps (5) around the passenger foot pegs and clip back into the bag. Tighten the straps until the saddlebags are held securely against the motorcycle.

9. Check to be certain the bags are secure. Tuck or tie down any excess strap material so that it can't get caught in the wheel spokes or scuff the paint while you travel.

Be certain that after bag installation, any excess strap material is either tucked in or tied down so that it does not rub against any painted surfaces. If strap material rubs against painted surfaces, it may scratch or scuff the paint.

WARNING:

After installing seat, pull upward on the front of the seat to be sure it is locked in position. If the seat is loose, it could shift during vehicle operation and startle the rider, causing loss of control and death or serious injury.

NOTE: The front straps (5) on the saddlebags are at an angle and are the longer straps.

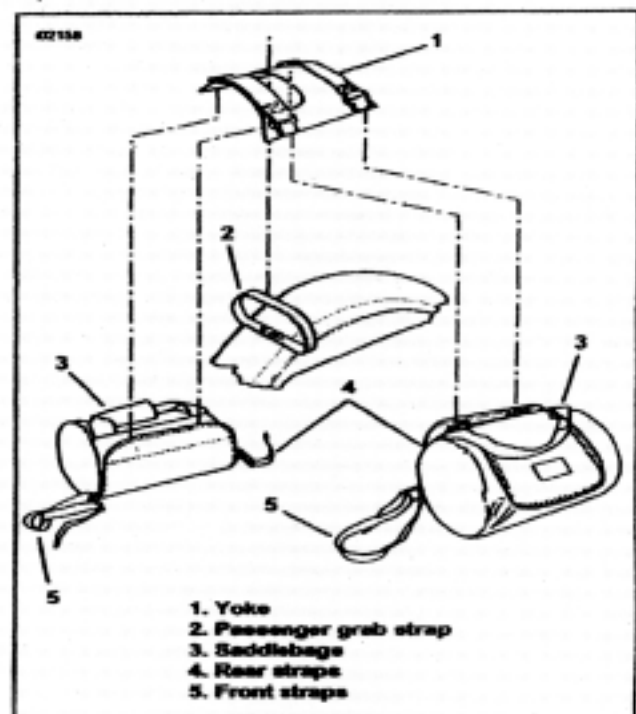


Figure 1. Install Saddlebags